


135 X 135 X 25.4 mm

Dimensions Drawing



OUTLINE(mm)

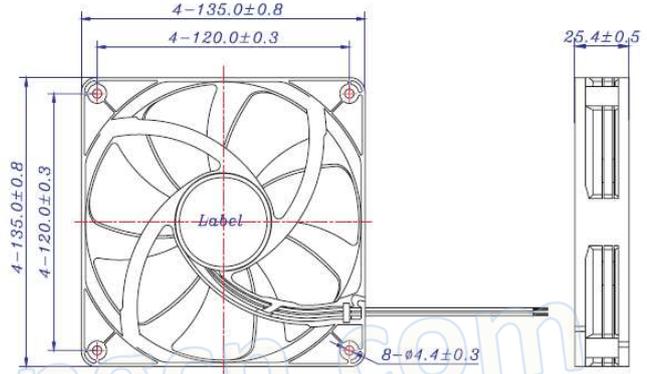

General Specification:

A、 Frame and Impeller:Thermal Plastic,UL94V-0

B、 Lead Wires:UL Tlype


(+):Red (-)Black

C、 Operation Temperature:-10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

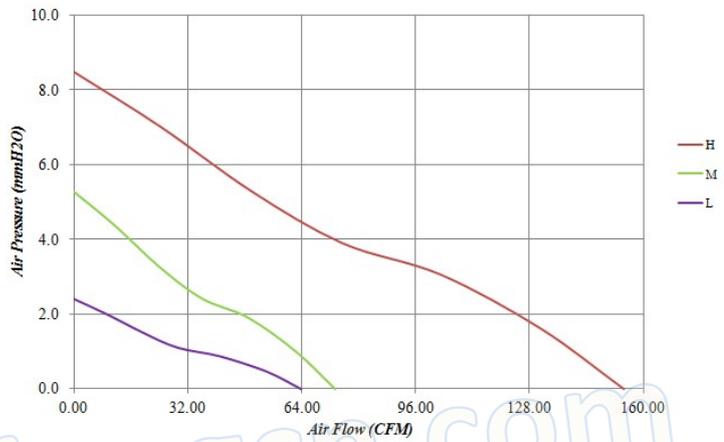

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL13525S	Sleeve	12	6.0-13.2	0.22	2.64	73.43	2.40	1,500	28.3	184
FDM13525S			6.0-13.2	0.38	4.56	115.80	5.28	2,300	41.3	184
FDH13525S			6.0-13.2	0.75	9.00	154.50	8.48	3,100	49.6	184
FDL13525B	Ball		6.0-13.2	0.22	2.64	73.43	2.40	1,500	28.3	184
FDM13525B			6.0-13.2	0.38	4.56	115.80	5.28	2,300	41.3	184
FDH13525B			6.0-13.2	0.75	9.00	154.50	8.48	3,100	49.6	184