


92 X 92 X 38 mm

Dimensions Drawing



OUTLINE(mm)

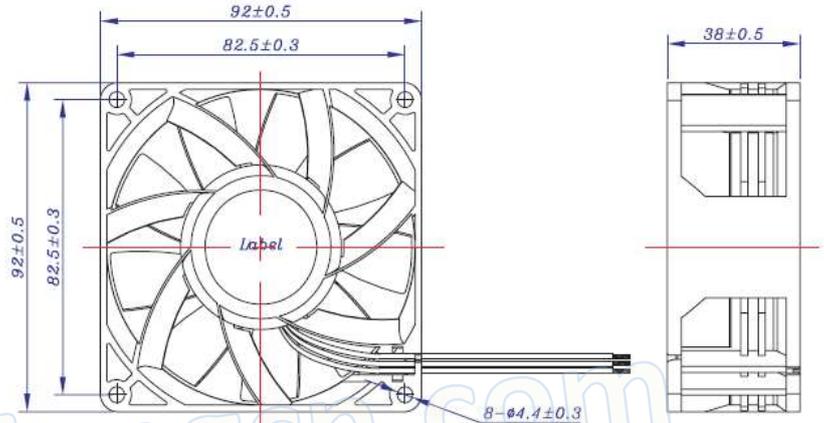

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

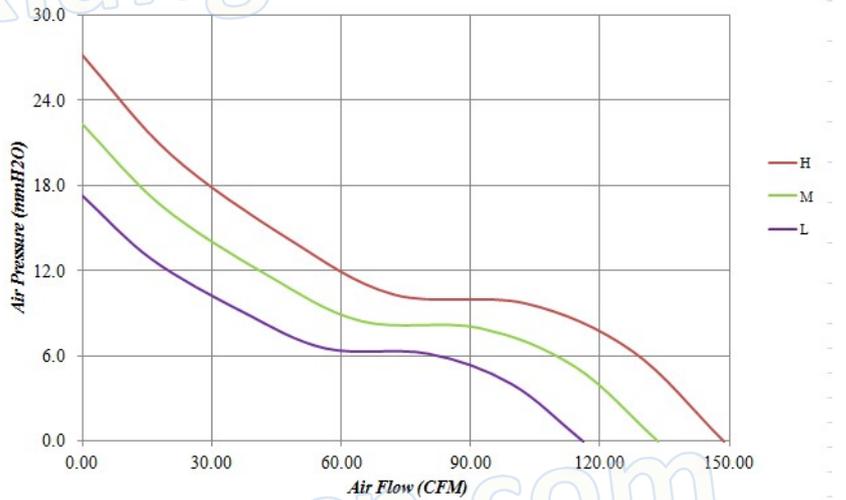

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight	
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)				
FGL9238B	Ball	12	6.0-13.2	1.00	12.00	116.03	17.30	4,800	55.5	230	
FGM9238B			6.0-13.2	1.50	18.00	133.63	22.30	5,400	58.1	230	
FGH9238B			6.0-13.2	1.90	22.80	148.79	27.20	6,000	61.3	230	
FGL9238B2		24	14.0-27.0	0.50	12.00	116.03	17.30	17.30	4,800	55.5	230
FGM9238B2			14.0-27.0	0.70	16.80	133.63	22.30	22.30	5,400	58.1	230
FGH9238B2			14.0-27.0	1.00	24.00	148.79	27.20	27.20	6,000	61.3	230