


92 X 92 X 38 mm

Dimensions Drawing

OUTLINE(mm)

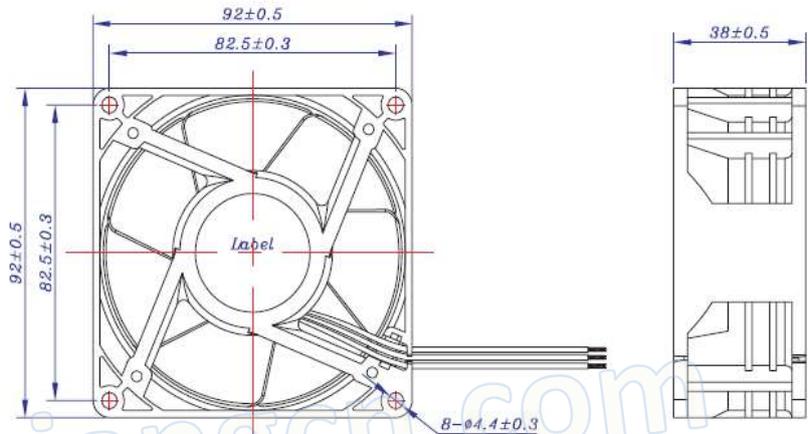

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

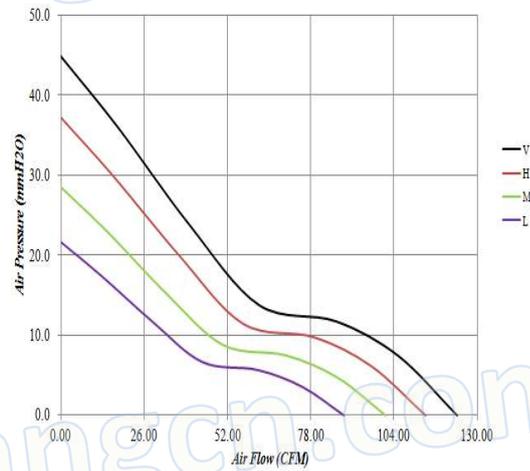

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight	
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)				
FDL9238B	Ball	12	6.0-13.2	0.75	9.00	88.40	21.60	6,000	52.5	225	
FDM9238B			6.0-13.2	1.00	12.00	101.38	28.50	6,900	56.1	225	
FDH9238B			6.0-13.2	1.50	18.00	113.97	37.20	7,800	58.8	225	
FDV9238B			6.0-13.3	1.90	22.80	123.86	44.80	8,500	62.0	225	
FDL9238B2		24	14.0-27.0	0.40	9.60	88.40	21.60	21.60	6,000	52.5	225
FDM9238B2			14.0-27.0	0.50	12.00	101.38	28.50	28.50	6,900	56.1	225
FDH9238B2			14.0-27.0	0.70	16.80	113.97	37.20	37.20	7,800	58.8	225
FDV9238B2			14.0-27.0	1.00	24.00	123.86	44.80	44.80	8,500	62.0	225