


90 X 90 X 25 mm



Dimensions Drawing

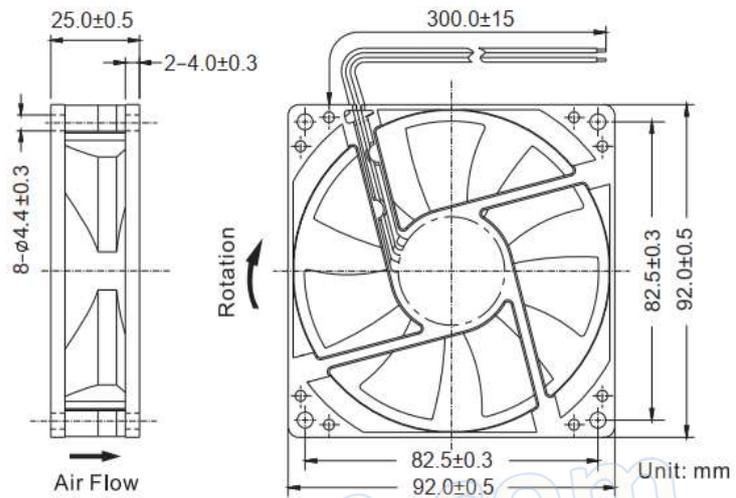

General Specification:

A、 Frame and Impeller:Thermal Plastic,UL94V-0

B、 Lead Wires:UL Tlype


(+):Red (-)Black

C、 Operation Temperature:-10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

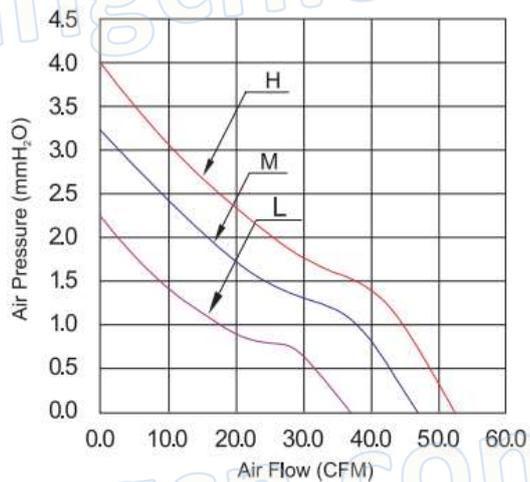

| Listed Model | Bearing System | Rated Voltage | Operating Voltage | Rated Current | Input Power | Maximum Air Flow | Maximum Air Pressure | Speed | Noise | Weight |
|--------------|----------------|---------------|-------------------|---------------|-------------|------------------|----------------------|-------|-------|--------|
| | | (V) | (V) | (A) | (W) | (CFM) | (mmAq) | | | |
| FDL9225S | Sleeve | 12 | 6.0-13.8 | 0.16 | 1.92 | 37.10 | 2.30 | 2,000 | 29.0 | 85 |
| FDM9225S | | | 6.0-13.8 | 0.19 | 2.28 | 47.00 | 3.20 | 2,500 | 33.4 | 85 |
| FDH9225S | | | 6.0-13.8 | 0.23 | 2.76 | 52.30 | 4.00 | 2,800 | 38.7 | 85 |
| FDL9225B | Ball | | 6.0-13.8 | 0.16 | 1.92 | 37.10 | 2.30 | 2,000 | 29.0 | 85 |
| FDM9225B | | | 6.0-13.8 | 0.19 | 2.28 | 47.00 | 3.20 | 2,500 | 33.4 | 85 |
| FDH9225B | | | 6.0-13.8 | 0.23 | 2.76 | 52.30 | 4.00 | 2,800 | 38.7 | 85 |
| FDL9225S2 | Sleeve | 24 | 12.0-27.6 | 0.15 | 3.60 | 37.10 | 2.30 | 2,000 | 29.0 | 85 |
| FDM9225S2 | | | 12.0-27.6 | 0.18 | 4.32 | 47.00 | 3.20 | 2,500 | 29.0 | 85 |
| FDH9225S2 | | | 12.0-27.6 | 0.22 | 5.28 | 52.30 | 4.00 | 2,800 | 33.4 | 85 |
| FDL9225B2 | Ball | | 12.0-27.6 | 0.15 | 3.60 | 37.10 | 2.30 | 2,000 | 29.0 | 85 |
| FDM9225B2 | | | 12.0-27.6 | 0.18 | 4.32 | 47.00 | 3.20 | 2,500 | 29.0 | 85 |
| FDH9225B2 | | | 12.0-27.6 | 0.22 | 5.28 | 52.30 | 4.00 | 2,800 | 33.4 | 85 |