


Φ92 X 25 mm

Dimensions Drawing

OUTLINE(mm)

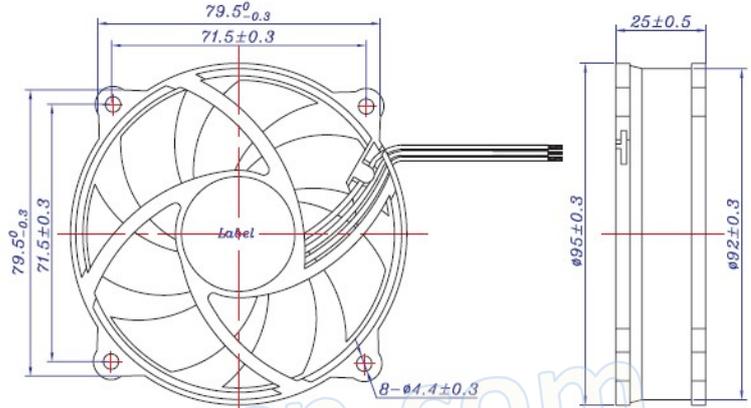

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

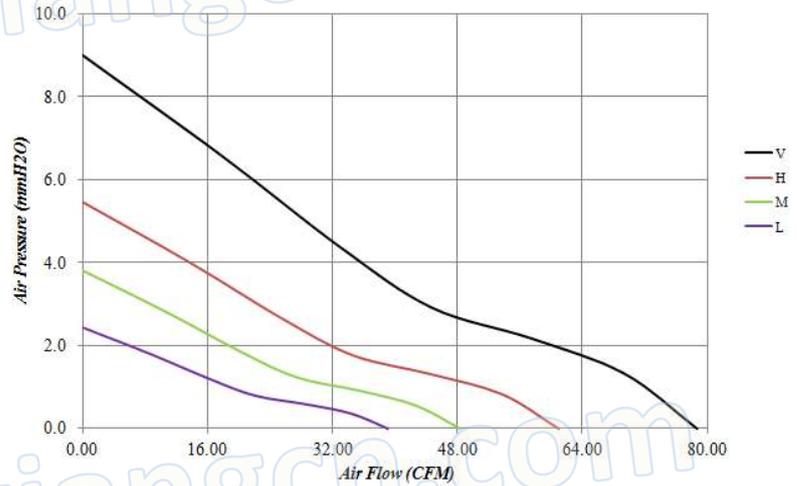

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL9225S	Sleeve	12	6.0-13.2	0.15	1.80	39.10	2.43	2,100	27.1	93
FDM9225S			6.0-13.2	0.25	3.00	48.40	3.80	2,600	31.0	93
FDH9225S			6.0-13.2	0.41	4.92	60.99	5.47	3,200	36.5	93
FDV9225S			6.0-13.2	0.54	6.48	78.69	9.01	4,200	44.8	93
FDL9225B	Ball		6.0-13.2	0.15	1.80	39.10	2.43	2,100	27.1	93
FDM9225B			6.0-13.2	0.25	3.00	48.40	3.80	2,600	31.0	93
FDH9225B			6.0-13.2	0.41	4.92	60.99	5.47	3,200	36.5	93
FDV9225B			6.0-13.2	0.54	6.48	78.69	9.01	4,200	44.8	93