


80 X 80 X 38 mm

Dimensions Drawing

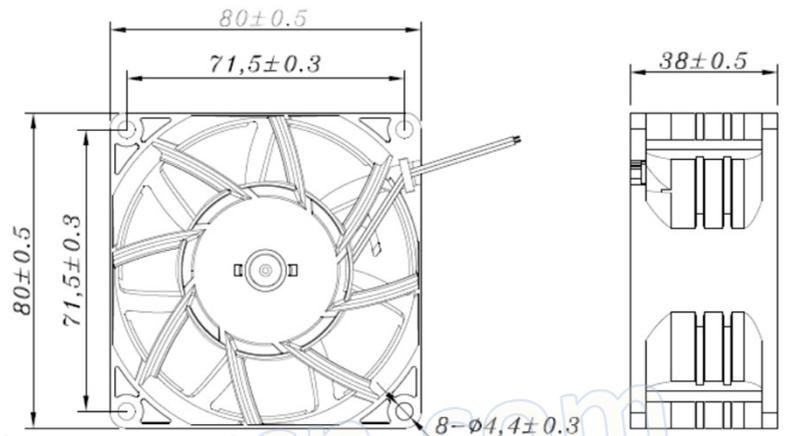

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller:Thermal Plastic,UL94V-0

B、 Lead Wires:UL Tlype


(+):Red (-)Black

C、 Operation Temperature:-10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

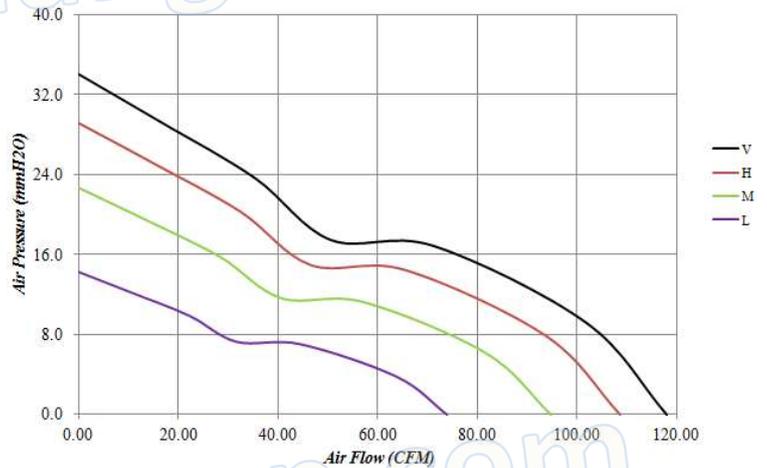

www.fuxiangcn.com

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight	
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)	
FGL8038B	Ball	12	6.0-13.2	0.54	6.48	73.9	14.2	5,400	51.0	195	
FGM8038B			6.0-13.2	1.20	14.40	94.9	22.7	6,800	55.4	195	
FGH8038B			6.0-13.2	1.80	21.60	108.8	29.2	7,800	59.7	195	
FGV8038B			6.0-13.2	2.10	25.20	118.1	34.1	8,500	62.8	195	
FGL8038B2		24	14.0-27.0	0.32	7.68	73.9	14.2	14.2	5,400	51.0	195
FGM8038B2			14.0-27.0	0.54	12.96	94.9	22.7	22.7	6,800	55.4	195
FGH8038B2			14.0-27.0	0.90	21.60	108.8	29.2	29.2	7,800	59.7	195
FGV8038B2			14.0-27.0	1.10	26.40	118.1	34.1	34.1	8,500	62.8	195