


80 X 80 X 25 mm (IP55/IP68)

Dimensions Drawing

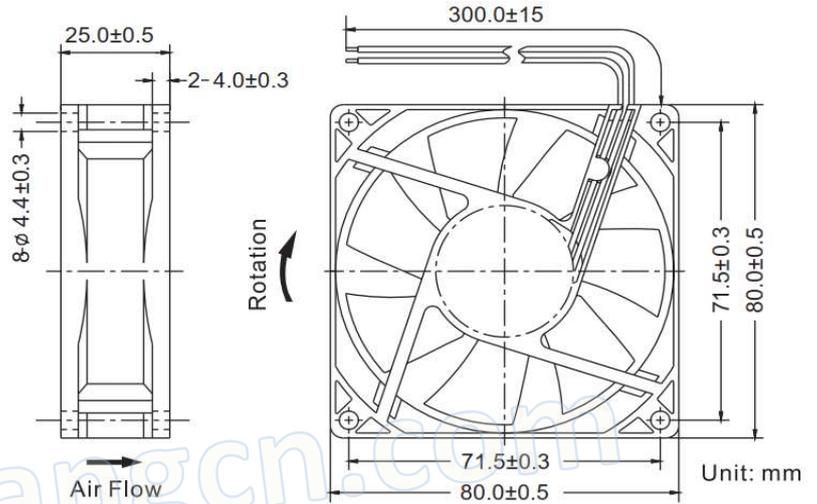

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-): Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

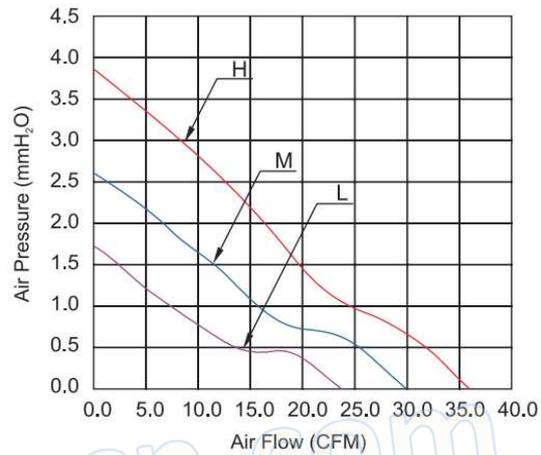

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL8025S	Sleeve	12	6.0-13.8	0.08	0.96	23.50	1.70	2,000	24.0	92
FDM8025S			6.0-13.8	0.11	1.32	29.50	2.60	2,500	29.0	92
FDH8025S			6.0-13.8	0.17	2.04	35.70	3.80	3,000	33.0	92
FDL8025B	Ball		6.0-13.8	0.08	0.96	23.50	1.70	2,000	24.0	92
FDM8025B			6.0-13.8	0.11	1.32	29.50	2.60	2,500	29.0	92
FDH8025B			6.0-13.8	0.17	2.04	35.70	3.80	3,000	33.0	92
FDL8025S2	Sleeve	24	12.0-27.0	0.09	2.16	23.50	1.70	2,000	24.0	92
FDM8025S2			12.0-27.0	0.12	2.88	29.50	2.60	2,500	29.0	92
FDH8025S2			12.0-27.0	0.15	3.60	35.70	3.80	3,000	33.0	92
FDL8025B2	Ball		12.0-27.0	0.09	2.16	23.50	1.70	2,000	24.0	92
FDM8025B2			12.0-27.0	0.12	2.88	29.50	2.60	2,500	29.0	92
FDH8025B2			12.0-27.0	0.15	3.60	35.70	3.80	3,000	33.0	92