


80 X 80 X 20 mm

Dimensions Drawing



**OUTLINE(mm)**

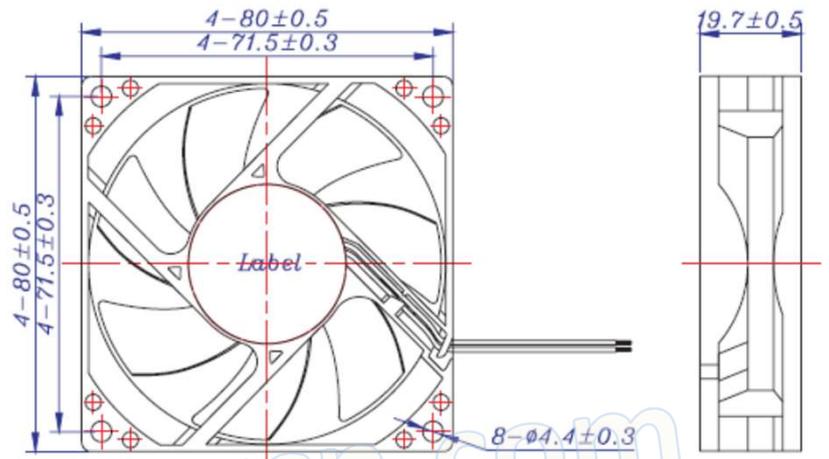

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

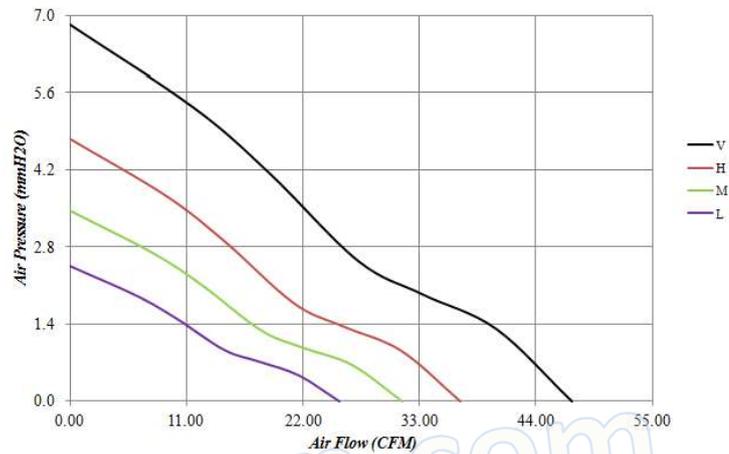

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL8020S	Sleeve	12	6.0-13.2	0.15	1.80	25.44	2.45	2,500	29.2	64
FDM8020S			6.0-13.2	0.21	2.52	31.41	3.45	3,000	33.6	64
FDH8020S			6.0-13.2	0.27	3.24	36.87	4.76	3,500	38.1	64
FDV8020S			6.0-13.2	0.48	5.76	47.36	6.84	4,300	43.7	64
FDL8020B	Ball		6.0-13.2	0.15	1.80	25.44	2.45	2,500	29.2	64
FDM8020B			6.0-13.2	0.21	2.52	31.41	3.45	3,000	33.6	64
FDH8020B			6.0-13.2	0.27	3.24	36.87	4.76	3,500	38.1	64
FDV8020B			6.0-13.2	0.48	5.76	47.36	6.84	4,300	43.7	64
FDL8020S2	Sleeve	24	14.0-27.0	0.10	2.40	25.44	2.45	2,500	29.2	64
FDM8020S2			14.0-27.0	0.13	3.12	31.41	3.45	3,000	33.6	64
FDH8020S2			14.0-27.0	0.19	4.56	36.87	4.76	3,500	38.1	64
FDV8020S2			14.0-27.0	0.28	6.72	47.36	6.84	4,300	43.7	64
FDL8020B2	Ball		14.0-27.0	0.10	2.40	25.44	2.45	2,500	29.2	64
FDM8020B2			14.0-27.0	0.13	3.12	31.41	3.45	3,000	33.6	64
FDH8020B2			14.0-27.0	0.19	4.56	36.87	4.76	3,500	38.1	64
FDV8020B2			14.0-27.0	0.28	6.72	47.36	6.84	4,300	43.7	64