


80 X 80 X 15 mm

Dimensions Drawing

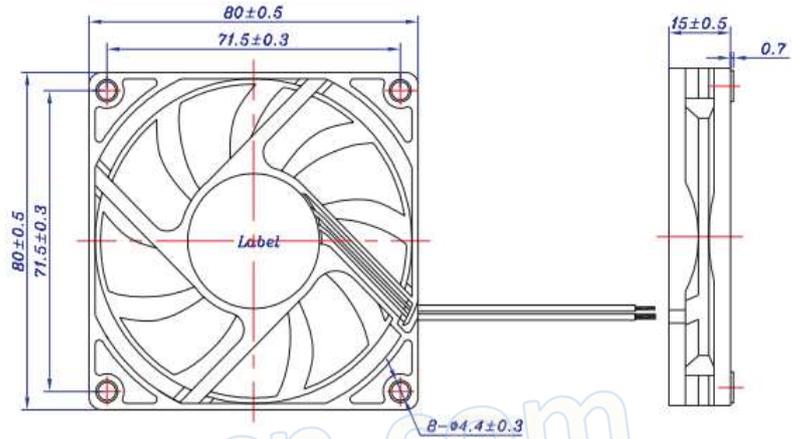

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

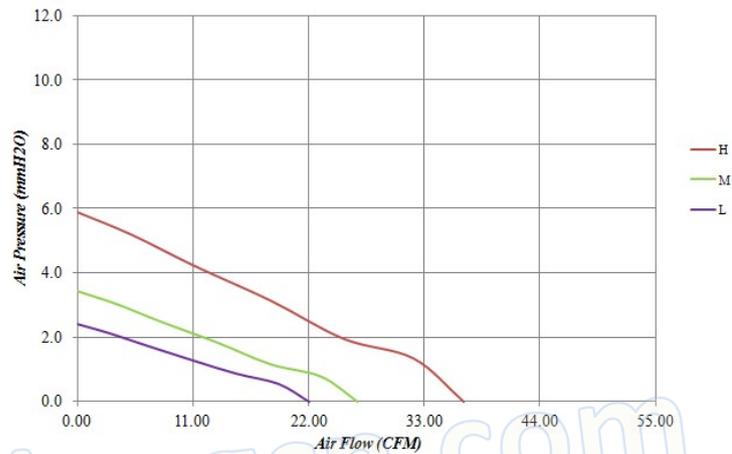

www.fuxiangcn.com

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL8015S	Sleeve	12	6.0-13.2	0.10	1.20	22.03	2.39	2,400	28.7	56
FDM8015S			6.0-13.2	0.18	2.16	26.63	3.42	3,000	34.2	56
FDH8015S			6.0-13.2	0.35	4.20	36.72	5.90	4,000	41.7	56
FDL8015B	Ball		6.0-13.2	0.10	1.20	22.03	2.39	2,400	28.7	56
FDM8015B			6.0-13.2	0.18	2.16	26.63	3.42	3,000	34.2	56
FDH8015B			6.0-13.2	0.35	4.20	36.72	5.90	4,000	41.7	56
FDL8015S2	Sleeve	24	14.0-27.0	0.08	1.92	22.03	2.39	2,400	28.7	56
FDM8015S2			14.0-27.0	0.12	2.88	26.63	3.42	3,000	34.2	56
FDH8015S2			14.0-27.0	0.23	5.52	36.72	5.90	4,000	41.7	56
FDL8015B2	Ball		14.0-27.0	0.08	1.92	22.03	2.39	2,400	28.7	56
FDM8015B2			14.0-27.0	0.12	2.88	26.63	3.42	3,000	34.2	56
FDH8015B2			14.0-27.0	0.23	5.52	36.72	5.90	4,000	41.7	56