


70 X 70 X 25 mm

Dimensions Drawing

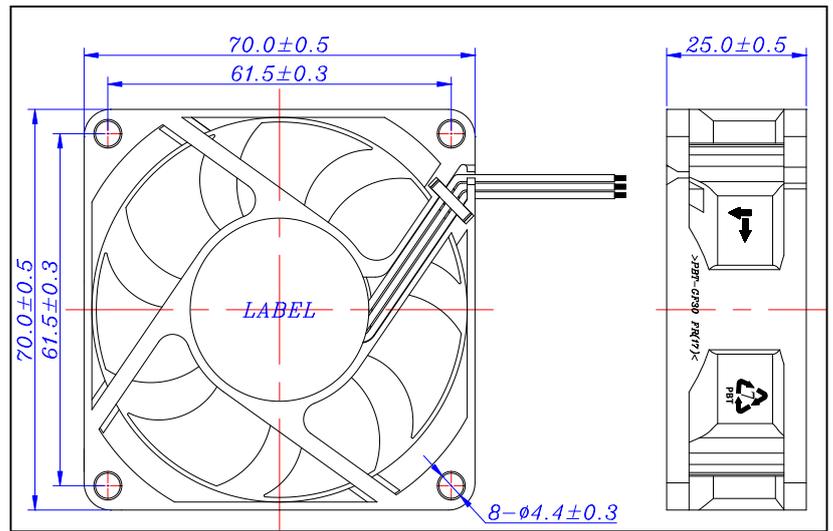

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

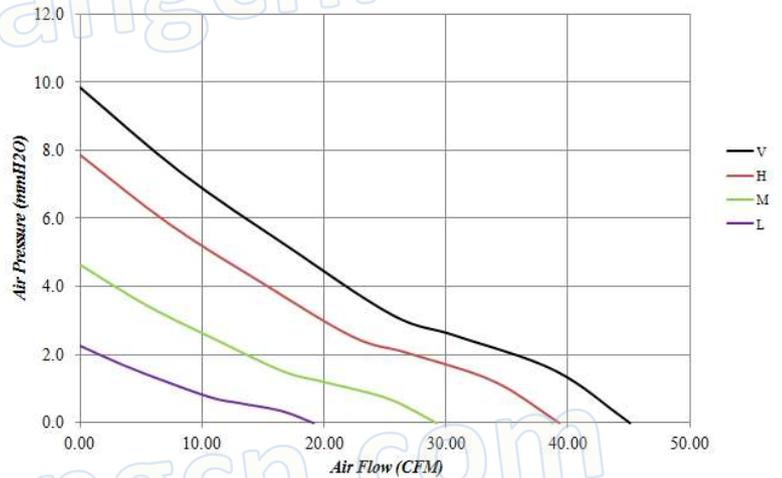

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL7025S	Sleeve	12	6.0-13.2	0.12	1.44	19.10	2.25	2,500	26.9	72
FDM7025S			6.0-13.2	0.22	2.64	29.22	4.65	3,600	35.3	72
FDH7025S			6.0-13.2	0.39	4.68	39.26	7.86	4,800	41.3	72
FDV7025S			6.0-13.2	0.43	5.16	45.11	9.85	5,400	44.5	72
FDL7025B	Ball		6.0-13.2	0.12	1.44	19.10	2.25	2,500	26.9	72
FDM7025B			6.0-13.2	0.22	2.64	29.22	4.65	3,600	35.3	72
FDH7025B			6.0-13.2	0.39	4.68	39.26	7.86	4,800	41.3	72
FDV7025B			6.0-13.2	0.43	5.16	45.11	9.85	5,400	44.5	72
FDL7025S2	Sleeve	24	14.0-27.0	0.09	2.16	19.10	2.25	2,500	26.9	72
FDM7025S2			14.0-27.0	0.13	3.12	29.22	4.65	3,600	35.3	72
FDH7025S2			14.0-27.0	0.20	4.80	39.26	7.86	4,800	41.3	72
FDV7025S2			14.0-27.1	0.25	6.00	45.11	9.85	5,400	44.5	72
FDL7025B2	Ball		14.0-27.0	0.09	2.16	19.10	2.25	2,500	26.9	72
FDM7025B2			14.0-27.0	0.13	3.12	29.22	4.65	3,600	35.3	72
FDH7025B2			14.0-27.0	0.20	4.80	39.26	7.86	4,800	41.3	72
FDV7025B2			14.0-27.1	0.25	6.00	45.11	9.85	5,400	44.5	72