


70 X 70 X 20 mm

Dimensions Drawing

OUTLINE(mm)

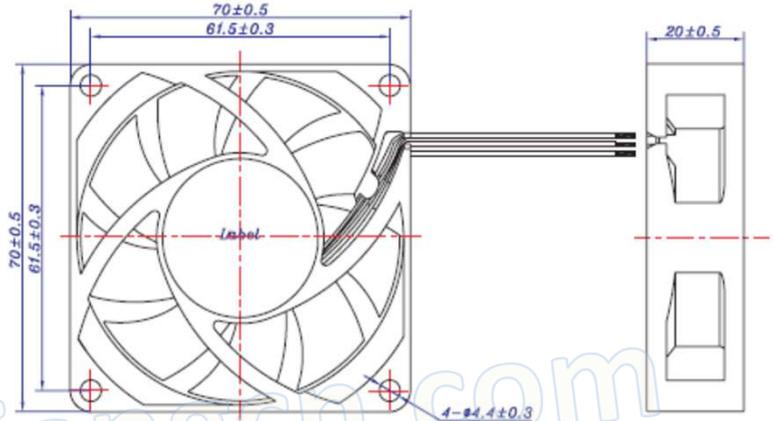

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

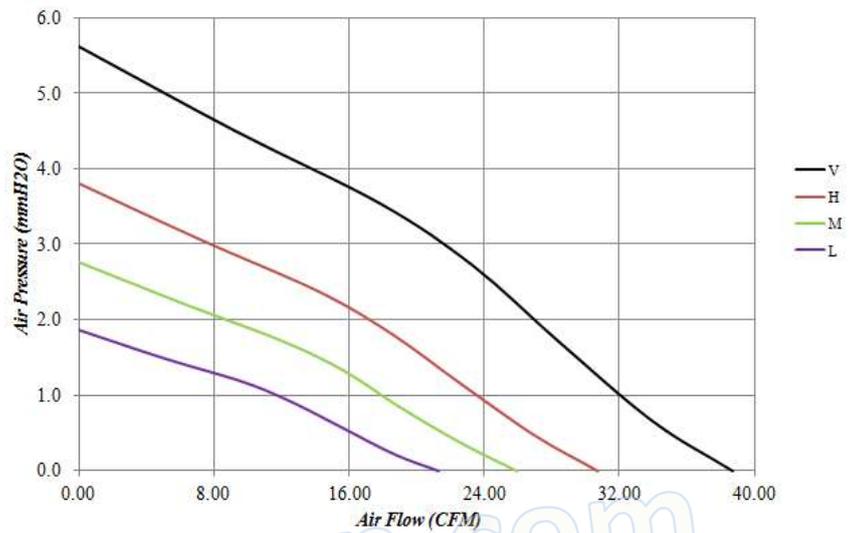

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL7020S	Sleeve	12	6.0-13.2	0.14	1.68	21.33	1.87	2,500	27.6	67
FDM7020S			6.0-13.2	0.19	2.28	25.97	2.76	3,000	30.7	67
FDH7020S			6.0-13.2	0.27	3.24	30.70	3.81	3,500	35.1	67
FDV7020S			6.0-13.2	0.43	5.16	38.69	5.63	4,300	40.1	67
FDL7020B	Ball		6.0-13.2	0.14	1.68	21.33	1.87	2,500	27.6	67
FDM7020B			6.0-13.2	0.19	2.28	25.97	2.76	3,000	30.7	67
FDH7020B			6.0-13.2	0.27	3.24	30.70	3.81	3,500	35.1	67
FDV7020B			6.0-13.2	0.43	5.16	38.69	5.63	4,300	40.1	67
FDL7020S2	Sleeve	24	14.0-27.0	0.08	1.92	21.33	1.87	2,500	27.6	67
FDM7020S2			14.0-27.0	0.11	2.64	25.97	2.76	3,000	30.7	67
FDH7020S2			14.0-27.0	0.16	3.84	30.70	3.81	3,500	35.1	67
FDV7020S2			14.0-27.1	0.24	5.76	38.69	5.63	4,300	40.1	67
FDL7020B2	Ball		14.0-27.0	0.08	1.92	21.33	1.87	2,500	27.6	67
FDM7020B2			14.0-27.0	0.11	2.64	25.97	2.76	3,000	30.7	67
FDH7020B2			14.0-27.0	0.16	3.84	30.70	3.81	3,500	35.1	67
FDV7020B2			14.0-27.1	0.24	5.76	38.69	5.63	4,300	40.1	67