


70 X 70 X 15 mm

Dimensions Drawing



OUTLINE(mm)

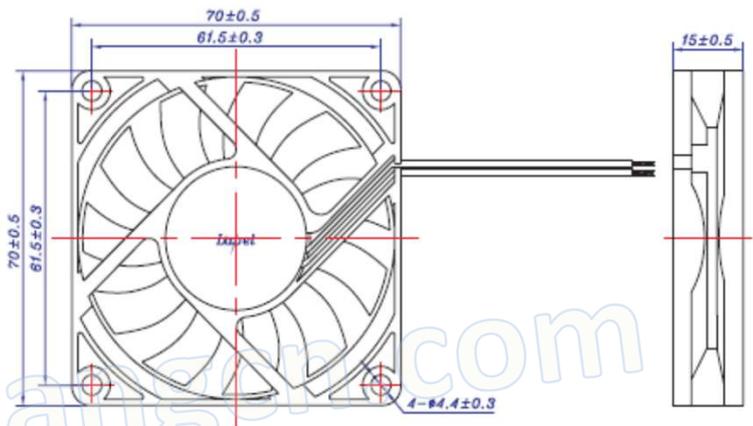

General Specification:

A、Frame and Impeller:Thermal Plastic,UL94V-0

B、Lead Wires:UL Tlype


(+):Red (-)Black

C、Operation Temperature:-10°C~70°C

35%~85RH

D、Storage Temperature: -40°C~80°C

35%~85RH

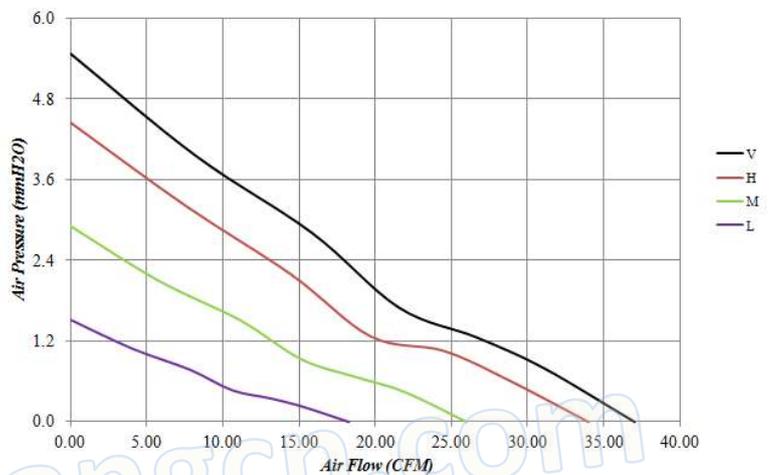

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL7015S	Sleeve	12	6.0-13.2	0.10	1.20	18.27	1.52	2,200	25.5	50
FDM7015S			6.0-13.2	0.17	2.04	25.98	2.91	3,000	30.3	50
FDH7015S			6.0-13.2	0.28	3.36	34.02	4.45	3,800	36.0	50
FDV7015S			6.0-13.2	0.41	4.92	37.02	5.48	4,200	38.6	50
FDL7015B	Ball		6.0-13.2	0.10	1.20	18.27	1.52	2,200	25.5	50
FDM7015B			6.0-13.2	0.17	2.04	25.98	2.91	3,000	30.3	50
FDH7015B			6.0-13.2	0.28	3.36	34.02	4.45	3,800	36.0	50
FDV7015B			6.0-13.2	0.41	4.92	37.02	5.48	4,200	38.6	50
FDL7015S2	Sleeve	24	14.0-27.0	0.10	2.40	18.27	1.52	2,200	25.5	50
FDM7015S2			14.0-27.0	0.16	3.84	25.98	2.91	3,000	30.3	50
FDH7015S2			14.0-27.0	0.21	5.04	34.02	4.45	3,800	36.0	50
FDV7015S2			14.0-27.0	0.25	6.00	37.02	5.48	4,200	38.6	50
FDL7015B2	Ball		14.0-27.0	0.10	2.40	18.27	1.52	2,200	25.5	50
FDM7015B2			14.0-27.0	0.16	3.84	25.98	2.91	3,000	30.3	50
FDH7015B2			14.0-27.0	0.21	5.04	34.02	4.45	3,800	36.0	50
FDV7015B2			14.0-27.0	0.25	6.00	37.02	5.48	4,200	38.6	50