


60 X 60 X 38 mm

Dimensions Drawing

OUTLINE(mm)

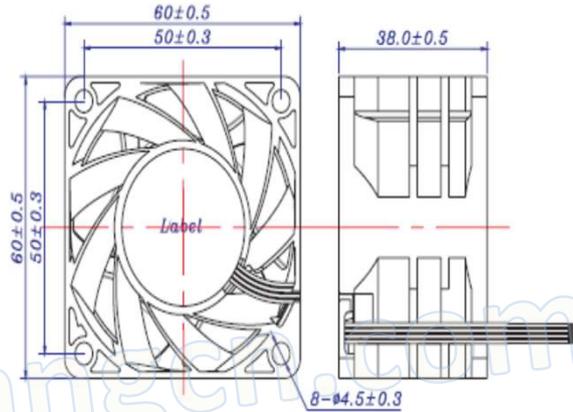

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

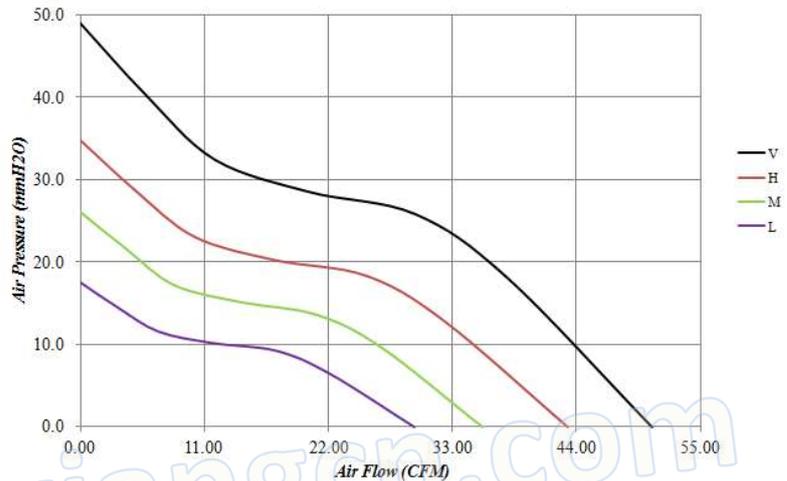

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL6038B	Ball	12	6.0-13.2	0.35	4.20	29.60	17.50	7,000	47.0	120
FDM6038B			6.0-13.2	0.50	6.00	35.62	26.00	8,500	52.3	120
FDH6038B			6.0-13.2	0.75	9.00	43.22	34.80	10,000	56.5	120
FDV6038B			6.0-13.2	1.20	14.40	50.66	49.00	12,000	60.6	120