


60 X 60 X 25 mm (IP55/IP68)

Dimensions Drawing

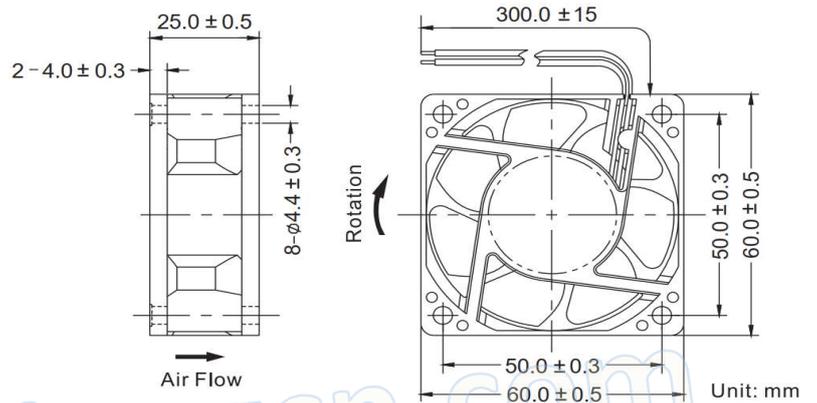

www.fuxiangcn.com

General Specification:

- A、 Frame and Impeller: Thermal Plastic, UL94V-0
- B、 Lead Wires: UL Tlype


(+): Red (-): Black

- C、 Operation Temperature: -10°C~70°C

35%~85RH

- D、 Storage Temperature: -40°C~80°C

35%~85RH

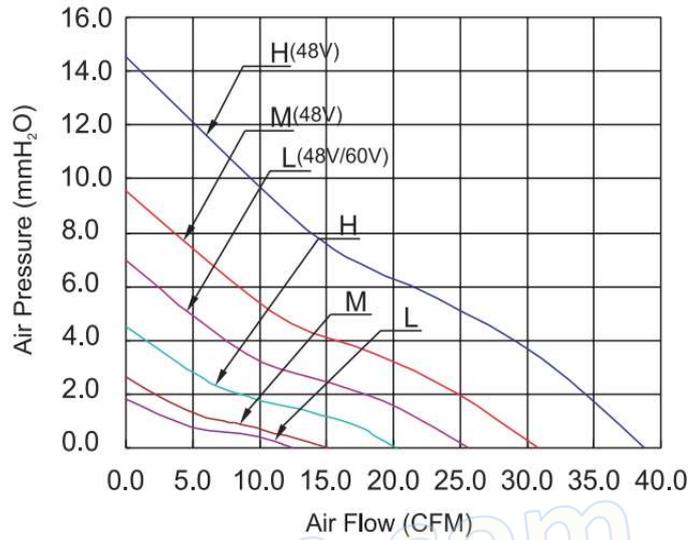

www.fuxiangcn.com

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed (rpm)	Noise (dB(A))	Weight (g)
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)			
FDL6025S	Sleeve	12	6.0-13.8	0.07	0.84	12.50	1.80	2,500	22.0	62
FDM6025S			6.0-13.8	0.10	1.20	15.10	2.60	3,000	24.0	62
FDH6025S			6.0-13.8	0.14	1.68	20.30	4.50	4,000	29.0	62
FDL6025B	Ball		6.0-13.8	0.07	0.84	12.50	1.80	2,500	22.0	62
FDM6025B			6.0-13.8	0.10	1.20	15.10	2.60	3,000	24.0	62
FDH6025B			6.0-13.8	0.14	1.68	20.30	4.50	4,000	29.0	62
FDL6025S2	Sleeve	24	12.0-27.6	0.09	2.16	12.50	1.80	2,500	22.0	62
FDM6025S2			12.0-27.6	0.10	2.40	15.10	2.60	3,000	24.0	62
FDH6025S2			12.0-27.6	0.14	3.36	20.30	4.50	4,000	29.0	62
FDL6025B2	Ball		12.0-27.6	0.09	2.16	12.50	1.80	2,500	22.0	62
FDM6025B2			12.0-27.6	0.10	2.40	15.10	2.60	3,000	24.0	62
FDH6025B2			12.0-27.6	0.14	3.36	20.30	4.50	4,000	29.0	62