


60 X 60 X 20 mm



Dimensions Drawing

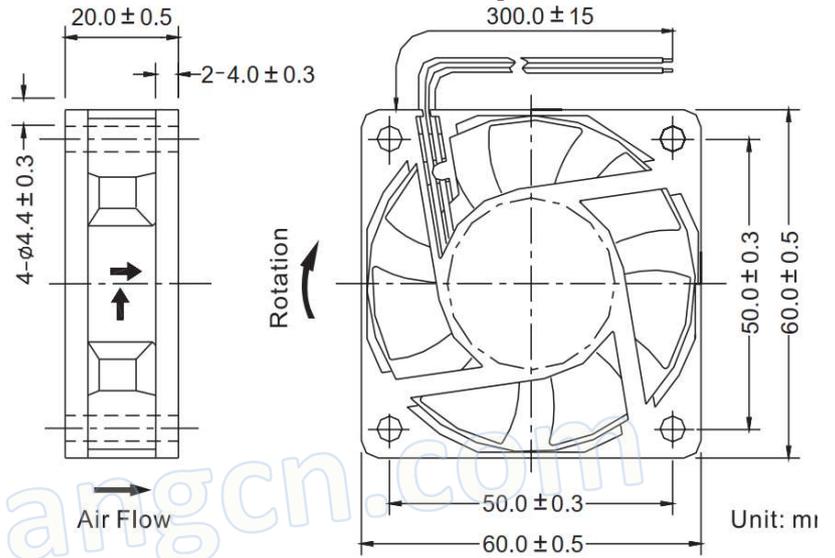

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-) Black

C、 Operation Temperature: -10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

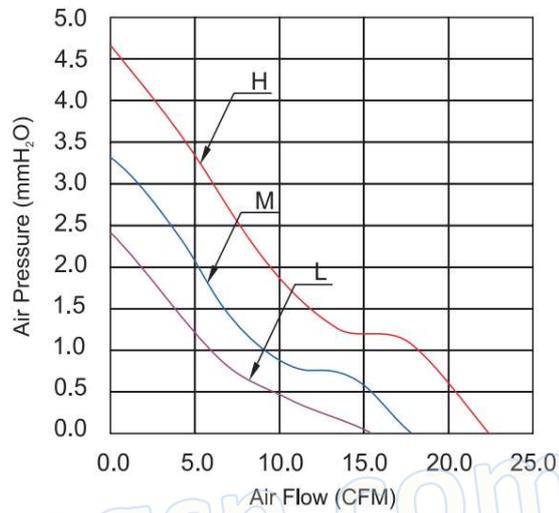

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)
FDL6020S	Sleeve	12	6.0-13.8	0.08	0.96	15.70	2.40	3,000	26.0	50
FDM6020S			6.0-13.8	0.12	1.44	18.50	3.30	3,500	29.0	50
FDH6020S			6.0-13.8	0.16	1.92	22.30	4.70	4,200	35.0	50
FDL6020B	Ball		6.0-13.8	0.08	0.96	15.70	2.40	3,000	26.0	50
FDM6020B			6.0-13.8	0.12	1.44	18.50	3.30	3,500	29.0	50
FDH6020B			6.0-13.8	0.16	1.92	22.30	4.70	4,200	35.0	50
FDL6020S2	Sleeve	24	12.0-27.6	0.08	1.92	15.70	2.40	2,500	26.0	50
FDM6020S2			12.0-27.6	0.10	2.40	18.50	3.30	3,000	29.0	50
FDH6020S2			12.0-27.6	0.13	3.12	22.30	4.70	4,000	35.0	50
FDL6020B2	Ball		12.0-27.6	0.08	1.92	15.70	2.40	2,500	26.0	50
FDM6020B2			12.0-27.6	0.10	2.40	18.50	3.30	3,000	29.0	50
FDH6020B2			12.0-27.6	0.13	3.12	22.30	4.70	4,000	35.0	50