


60 X 60 X 10 mm

Dimensions Drawing

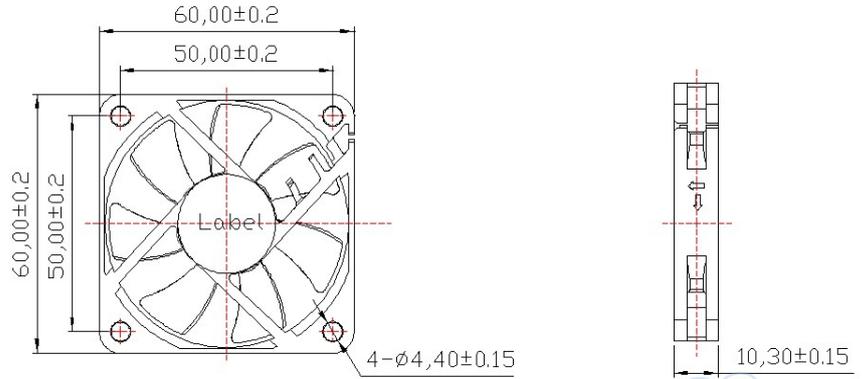

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller: Thermal Plastic, UL94V-0

B、 Lead Wires: UL Tlype


(+): Red (-): Black

C、 Operation Temperature: -10°C ~ 70°C

35% ~ 85RH

D、 Storage Temperature: -40°C ~ 80°C

35% ~ 85RH

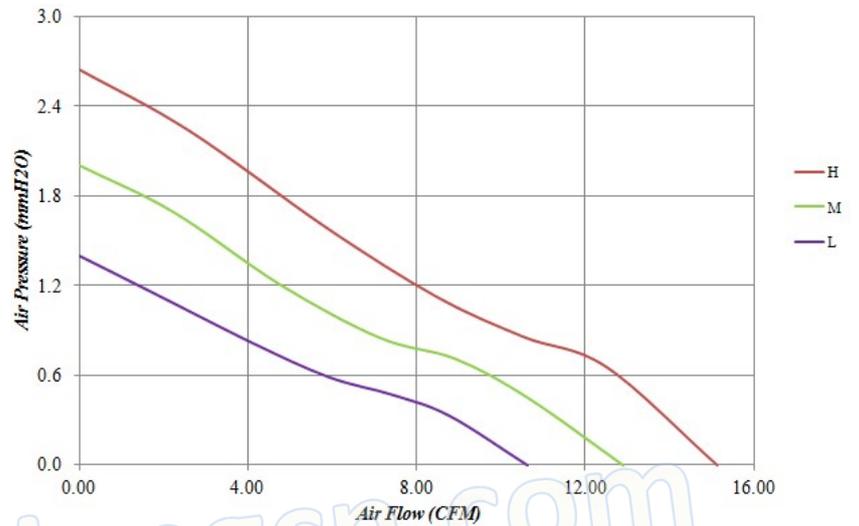

www.fuxiangcn.com

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)			
FDL6010S	Sleeve	12	6.0-13.2	0.09	1.08	10.63	1.40	3,000	18.7	21
FDM6010S			6.0-13.2	0.12	1.44	12.90	2.00	3,600	24.6	21
FDH6010S			6.0-13.2	0.17	2.04	15.14	2.65	4,200	28.6	21
FDL6010B	Ball		6.0-13.2	0.09	1.08	10.63	1.40	3,000	18.7	21
FDM6010B			6.0-13.2	0.12	1.44	12.90	2.00	3,600	24.6	21
FDH6010B			6.0-13.2	0.17	2.04	15.14	2.65	4,200	28.6	21