


50 X 50 X 15 mm

Dimensions Drawing



OUTLINE(mm)

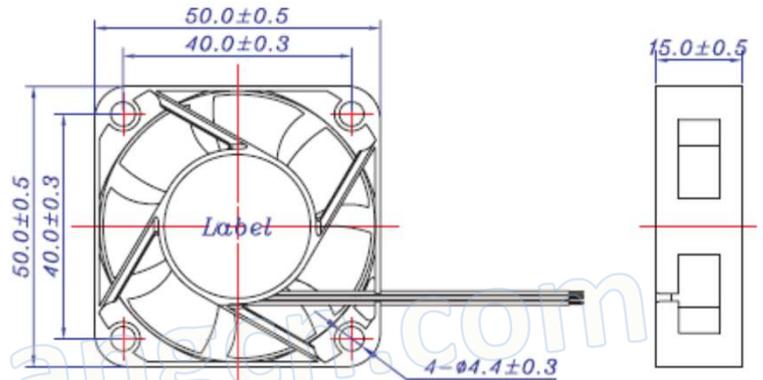

General Specification:

A、 Frame and Impeller:Thermal Plastic,UL94V-0

B、 Lead Wires:UL Tlype


(+):Red (-)Black

C、 Operation Temperature:-10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

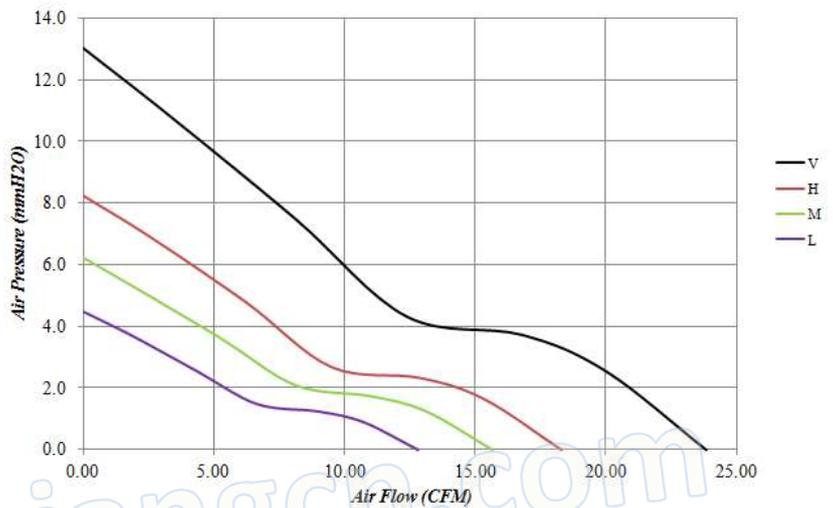

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed	Noise	Weight	
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)	(rpm)	dB(A)	(g)	
FDL5015S5	Sleeve	5	3.6-6.8	0.25	1.25	12.82	4.47	5,000	31.0	29	
FDM5015S5			3.6-6.8	0.33	1.65	15.68	6.23	6,000	34.7	29	
FDH5015S5			3.6-6.8	0.50	2.50	18.31	8.26	7,000	38.9	29	
FDL5015B5	Ball		3.6-6.8	0.25	1.25	12.82	4.47	5,000	31.0	29	
FDM5015B5			3.6-6.8	0.33	1.65	15.68	6.23	6,000	34.7	29	
FDH5015B5			3.6-6.8	0.50	2.50	18.31	8.26	7,000	38.9	29	
FDL5015S	Sleeve		12	6.0-13.2	0.10	1.20	12.82	4.47	5,000	31.0	29
FDM5015S				6.0-13.2	0.14	1.68	15.68	6.23	6,000	34.7	29
FDH5015S				6.0-13.2	0.20	2.40	18.31	8.26	7,000	38.9	29
FDV5015S	6.0-13.2	0.35		4.20	23.84	13.02	9,000	45.3	29		
FDL5015B	Ball	6.0-13.2		0.10	1.20	12.82	4.47	5,000	31.0	29	
FDM5015B		6.0-13.2		0.14	1.68	15.68	6.23	6,000	34.7	29	
FDH5015B		6.0-13.2		0.20	2.40	18.31	8.26	7,000	38.9	29	
FDV5015B		6.0-13.2		0.35	4.20	23.84	13.02	9,000	45.3	29	