


50 X 50 X 10 mm

Dimensions Drawing

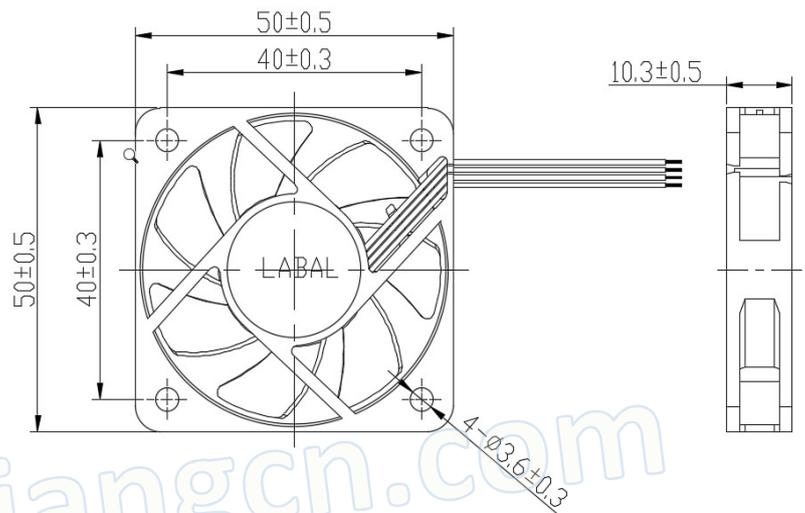

www.fuxiangcn.com

General Specification:

A、 Frame and Impeller:Thermal Plastic,UL94V-0

B、 Lead Wires:UL Tlype


(+):Red (-)Black

C、 Operation Temperature:-10°C~70°C

35%~85RH

D、 Storage Temperature: -40°C~80°C

35%~85RH

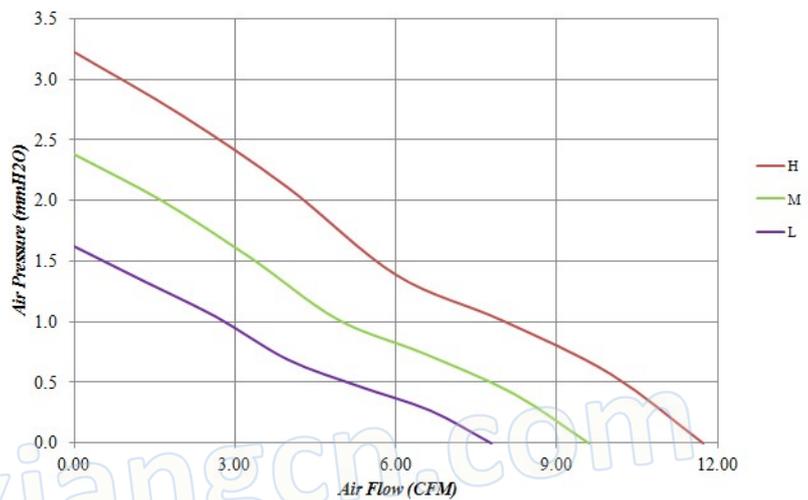

www.fuxiangcn.com

Listed Model	Bearing System	Rated Voltage	Operating Voltage	Rated Current	Input Power	Maximum Air Flow	Maximum Air Pressure	Speed (rpm)	Noise (dB(A))	Weight (g)	
		(V)	(V)	(A)	(W)	(CFM)	(mmAq)				
FDL5010LS5	Sleeve	5	4.0-6.0	0.11	0.55	7.78	1.62	4,000	20.7	18	
FDM5010S5				0.18	0.90	9.61	2.38	5,000	27.8	18	
FDH5010S5				0.26	1.30	11.74	3.23	6,000	32.8	18	
FDL5010LB5	Ball		4.0-6.0	0.11	0.55	7.78	1.62	4,000	20.7	18	
FDM5010B5				0.18	0.90	9.61	2.38	5,000	27.8	18	
FDH5010B5				0.26	1.30	11.74	3.23	6,000	32.8	18	
FDL5010S	Sleeve		12	6.0-13.2	0.08	0.96	7.78	1.62	4,000	20.7	18
FDM5010S					0.10	1.20	9.61	2.38	5,000	27.8	18
FDH5010S					0.12	1.44	11.74	3.23	6,000	32.8	18
FDL5010B	Ball	6.0-13.2		0.08	0.96	7.78	1.62	4,000	20.7	18	
FDM5010B				0.10	1.20	9.61	2.38	5,000	27.8	18	
FDH5010B				0.12	1.44	11.74	3.23	6,000	32.8	18	